

11. SPECIFICATIONS

Dimensions and Weight

Model	EU10i
Description code	EZGA
Length	450 mm (17.7 in)
Width	240 mm (9.4 in)
Height	380 mm (15.0 in)
Dry weight	13 kg (29 lbs)

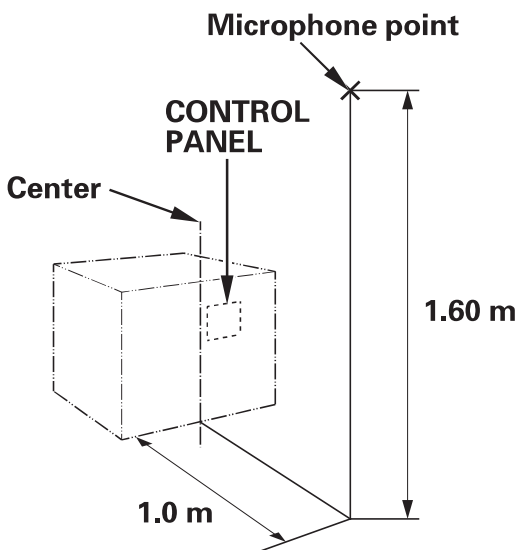
Engine

Model	GXH50
Engine type	4-stroke, overhead valve, single cylinder
Displacement	50 cm ³ (3.1 cu-in)
Bore × Stroke	41.8 × 36.0 mm (1.64 in × 1.42 in)
Compression ratio	8.0:1
Engine speed	5,500 rpm (with eco throttle switch OFF)
Cooling system	Forced air
Ignition system	Full transistor
Oil capacity	0.25 ℓ (0.26 US qt , 0.22 Imp qt)
Fuel tank capacity	2.3 ℓ (0.61 US gal , 0.51 Imp gal)
Spark plug	CR4HSB (NGK) U14FSR-UB (DENSO)

Generator

Model		EU10i	
Type		G, GW, B, F, W	U
AC output	Rated voltage (V)	230	240
	Rated frequency (Hz)	50	50
	Rated Ampere (A)	3.9	3.8
	Rated Output (VA)	900	
	Max Output (VA)	1,000	
DC rated output	Only for charging 12 V automotive batteries. 12 V, 8 A		

Noise

Model		EU10i	
Type		G, GW, B, F, W	U
Sound pressure level (LpA) According to 98/37/EC		72 dB	_____
 <p>The diagram illustrates the noise measurement setup. It shows a 3D perspective of a rectangular generator. A vertical line from the top center of the generator to a point marked with an 'X' is labeled 'Microphone point'. A vertical dimension line to the right of this line indicates a height of '1.60 m'. A horizontal dimension line from the center of the generator's top surface to the microphone point is labeled '1.0 m'. The top surface of the generator is labeled 'CONTROL PANEL' and 'Center'.</p>			
Guaranteed sound power level (LWA) Tested by 2000/14/EC		87 dB	_____

NOTE:

Specifications are subject to change without notice.